282108-1 🗸 ACTIVE


AMP | AMP Superseal 1.5mm Series

TE Internal #: 282108-1 6 Position Housing, Housing for Male Terminals, Wire-to-Wire, 6 mm [.236 in] Centerline, Sealable, Black, Wire & Cable, AMP Superseal 1.5mm Series

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > AMP SUPERSEAL 1.5MM, CONNECTOR HOUSING



Number of Positions: 6

Connector & Housing Type: Housing for Male Terminals

Connector System: Wire-to-Wire

Centerline (Pitch): 6 mm [.236 in]

Sealable: Yes

All AMP SUPERSEAL 1.5MM, CONNECTOR HOUSING (19)

Features

Product Type Features

Mixed & Hybrid Connector

No

Connector Shape

Rectangular

Connector & Housing Type	Housing for Male Terminals			
Connector System	Wire-to-Wire			
Sealable	Yes			
Primary Locking Feature	Integrated in Housing			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Number of Positions	6			
Number of Rows	1			
Electrical Characteristics				
Operating Voltage	24 VDC			
Nominal Voltage Architecture	12 V, 24 V			
Body Features				
Cable Exit Angle	180°			
Primary Product Color	Black			
Connector & Keying Code	Neutral			

C For support call+1 800 522 6752

6 Position Housing, Housing for Male Terminals, Wire-to-Wire, 6 mm [.236 in] Centerline, Sealable, Black, Wire & Cable, AMP Superseal 1.5mm Series



Contact Features

Contact Size	1.5mm			
Contact Type	Tab			
Contact Current Rating (Max)	14 A			
Mechanical Attachment				
Strain Relief	Without			
Terminal Position Assurance	Yes			
Mating Alignment Type	Polarizing Rib			
Mating Alignment	With			
Connector Mounting Type	Cable Mount (Free-Hanging)			
Housing Features				
Housing Material	PAGF			
Centerline (Pitch)	6 mm[.236 in]			
Dimensions				
Product Width	13.8 mm[.543 in]			
Product Length	43.8 mm[1.724 in]			
Connector Height	42 mm[1.654 in]			

Usage Conditions

Operating Temperature (Max)	125 °C[158 °F][167 °F][176 °F][185 °F][194 °F] [212 °F][221 °F][230 °F][248 °F][257 °F]				
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]				
Operation/Application					
Circuit Application	Signal				
Packaging Features					
Packaging Quantity	550				
Packaging Method	Box				
Other					
Serviceable	No				
Connector Position Assurance Capable	No				

Product Compliance

For compliance documentation, visit the product page on TE.com>

6 Position Housing, Housing for Male Terminals, Wire-to-Wire, 6 mm [.236 in] Centerline, Sealable, Black, Wire & Cable, AMP Superseal 1.5mm Series




EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

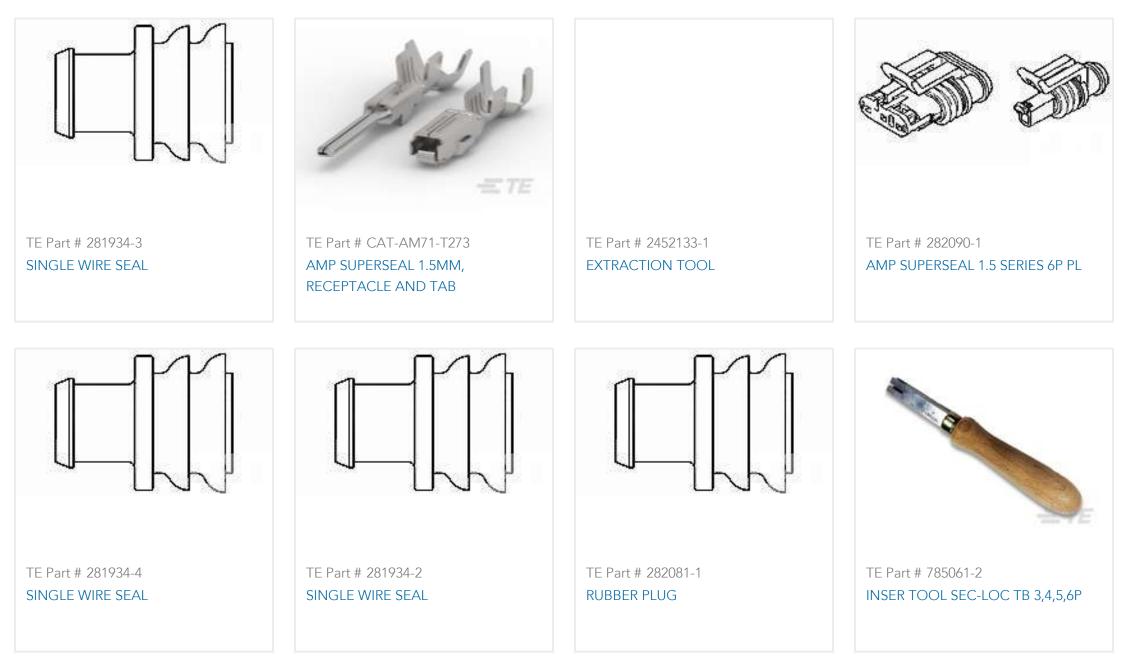


Also in the Series AMP Superseal 1.5mm Series

S For support call+1 800 522 6752

04/04/2025 03:14AM | Page 3

6 Position Housing, Housing for Male Terminals, Wire-to-Wire, 6 mm [.236 in] Centerline, Sealable, Black, Wire & Cable, AMP Superseal 1.5mm Series



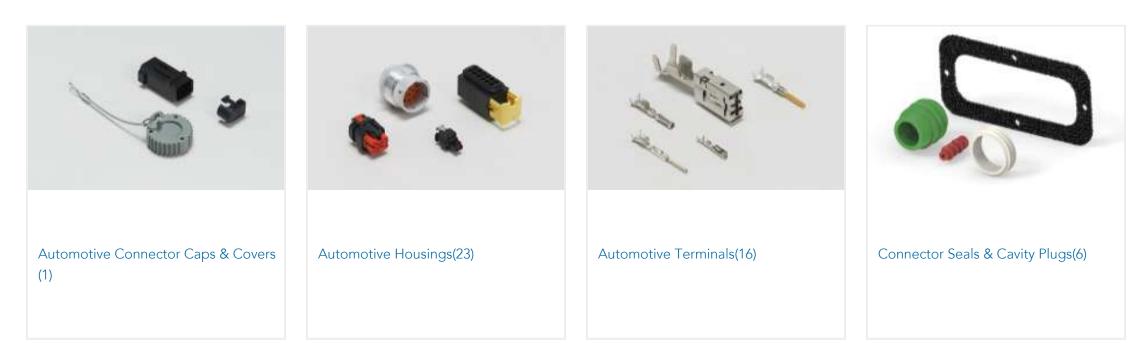









Other Automotive Connector Accessories(1)

Customers Also Bought









TE Part #CAT-AM71-CH8172	TE Part #281934-2	TE Part #CAT-AM71-T273	TE Part #881594-1
AMP SUPERSEAL 1.5MM,	SINGLE WIRE SEAL	AMP SUPERSEAL 1.5MM,	ECONOSEAL TAB .070
CONNECTOR HOUSING		RECEPTACLE AND TAB	

Documents

Product Drawings

AMP SUPERSEAL 1.5 SERIES 6P CA

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_282108-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_282108-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_282108-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

6 Position Housing, Housing for Male Terminals, Wire-to-Wire, 6 mm [.236 in] Centerline, Sealable, Black, Wire & Cable, AMP Superseal 1.5mm Series



Datasheets & Catalog Pages AMP SUPERSEAL 1.5mm Connector System

English

ICT Terminals and Connectors Catalogue

English

Product Specifications

Product Specification

English

Instruction Sheets
AMP SUPERSEAL 1.5 SERIES

English

Customer Manual (non U.S.)

English